


# 1206KC3

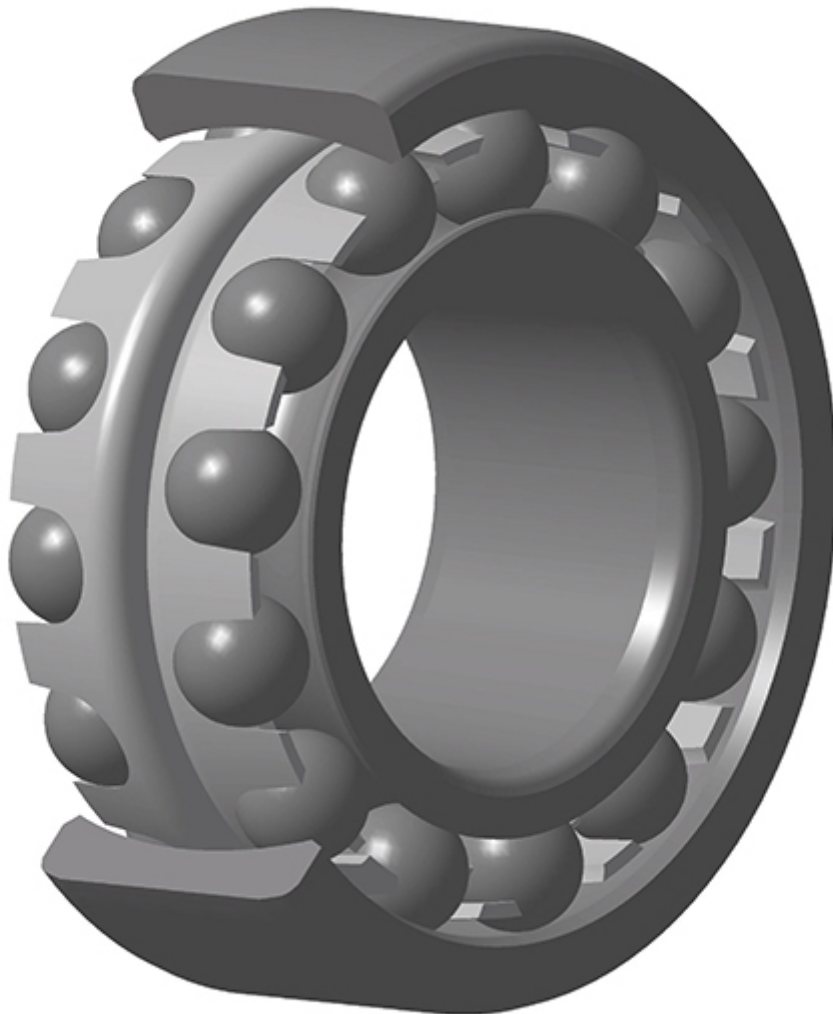

## 1206KC3 Bearing dimensions and specification in NTN catalogue:

B	16 mm
D	62 mm
d	30 mm
e	0.24
D1	51.5 mm
Y0	2.7
Y1	2.57
Y2	3.98

d1	40.3 mm
Mass	0.22 kg

## SNR 1206KC3 Double Row Self Aligning Ball Bearings Bearing Data Sheet:

Nlim	15,000 rpm
Nref	11,000 rpm
Brand	SNR
Ce min	5 mm
Da max	57 mm
da max	38 mm
da min	35 mm
db min	33 mm
ra max	1 mm
rs min	1 mm
Dynamic load, C	15.4 kN
Precision class	P0
Static load, C0	4.65 kN
Radial clearance class	C3
Associated sleeve reference	H206
Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-40 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic inner ring frequency, BPF1	8.21 Hz
Characteristic outer ring frequency, BPF0	5.79 Hz
Characteristic rolling element frequency, BSF	5.55 Hz