


# 695AZZ/5K

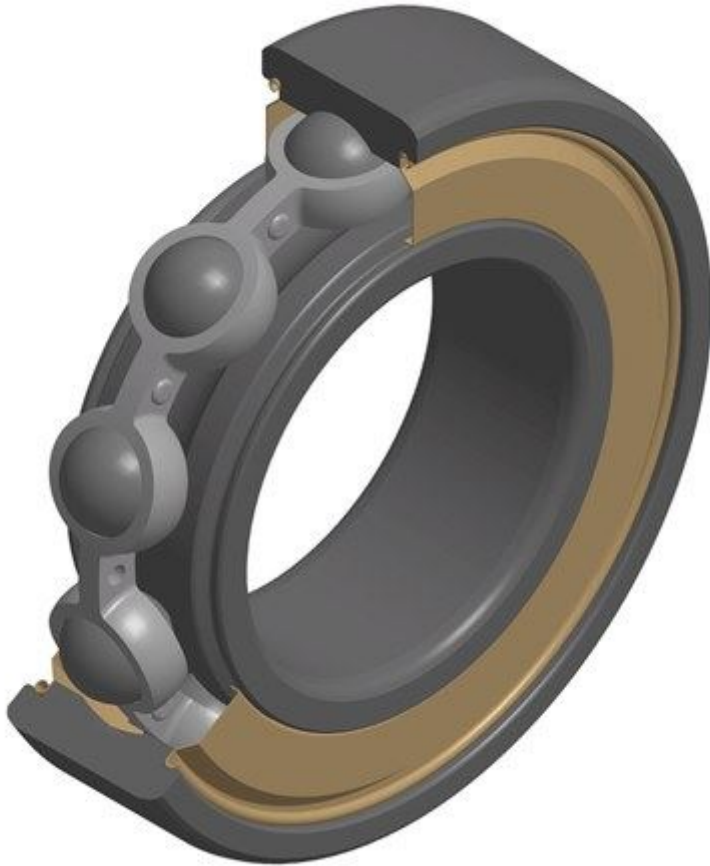

## 695AZZ/5K Bearing dimensions and specification in NTN catalogue:

|        |                           |
|--------|---------------------------|
| B      | 4 mm                      |
| D      | 13 mm                     |
| d      | 5 mm                      |
| f0     | 13.4                      |
| Bore   | 0.197 Inch   5 Millimeter |
| Mass   | 0.002 kg                  |
| Noun   | Bearing                   |
| Da max | 11.4 mm                   |
| UNSPSC | 31171504                  |
| da min | 6.6 mm                    |

# NTN 695AZZ/5K Single Row Deep Groove Ball Bearings

## Bearing Data Sheet:

|                        |   |
|------------------------|---|
| ra max                 | 0.2 mm  |
| rs min                 | 0.2 mm  |
| Category               | Single Row Ball Bearing   |
| Enclosure              | 2 Metal Shields   |
| Inventory              | 0.0   |
| Snap Ring              | No  |
| Cage Material          | Steel   |
| Inch - Metric          | Metric  |
| Nlim (grease)          | 40,000 rpm  |
| Product Group          | B00308  |
| Keyword String         | Ball  |
| Other Features         | Deep Groove   Prelubricated   |
| Dynamic load, C        | 1.08 kN   |
| Precision Class        | ABEC 1   ISO P0   |
| Rolling Element        | Ball Bearing  |
| Static load, C0        | 0.43 kN   |
| Inner Race Width       | 0 Inch   0 Millimeter   |
| Long Description       | 5MM Bore; 13MM Outside Diameter; 4MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel |
| Manufacturer URL       | <a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>   |
| Outer Race Width       | 0.157 Inch   4 Millimeter   |
| Outside Diameter       | 0.512 Inch   13 Millimeter  |
| Manufacturer Name      | NTN   |
| Weight / Kilogram      | 0   |
| Internal Clearance     | C0-Medium   |
| Minimum Buy Quantity   | N/A   |
| Fatigue limit load, Cu | 0.02 kN   |

|                                 |               |
|---------------------------------|---------------|
| Harmonized Tariff Code          | 8482.10.50.68 |
| Radial clearance class          | CN            |
| Internal Special Features       | No            |
| Max operating temperature, Tmax | 120 °C        |
| Maximum Capacity / Filling Slot | No            |
| Min operating temperature, Tmin | -20 °C        |