


608ZZ/5C

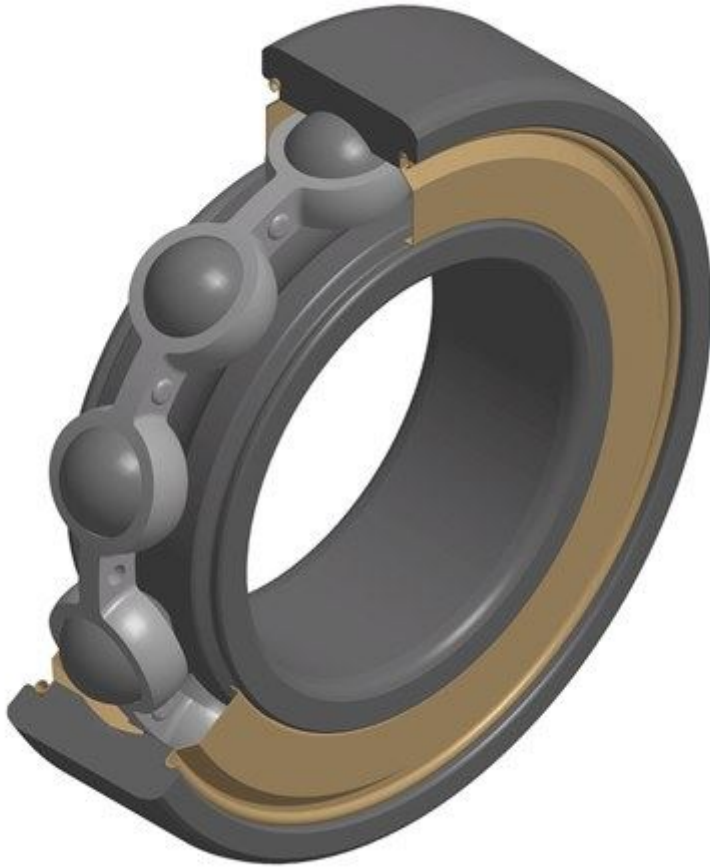

608ZZ/5C Bearing dimensions and specification in NTN catalogue:

B	7 mm
D	22 mm
d	8 mm
f0	12.5
Bore	0.315 Inch 8 Millimeter
Mass	0.01 kg
Noun	Bearing
Brand	NTN
Da max	20 mm
UNSPSC	31171504

NTN 608ZZ/5C Single Row Deep Groove Ball Bearings Bearing Data Sheet:

da min	10 mm
ra max	0.3 mm
rs min	0.3 mm
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Inventory	0.0
Snap Ring	No
Weight / LBS	0.02645
Cage Material	Steel
Inch - Metric	Metric
Nlim (grease)	32,000 rpm
Product Group	B00308
Keyword String	Ball
Other Features	Deep Groove Chevron SRI2 Prelubricated
Dynamic load, C	3.35 kN
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Static load, C0	1.4 kN
Inner Race Width	0 Inch 0 Millimeter
Long Description	8MM Bore; 22MM Outside Diameter; 7MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.276 Inch 7 Millimeter
Outside Diameter	0.866 Inch 22 Millimeter
Manufacturer Name	NTN
Weight / Kilogram	0
Internal Clearance	C0-Medium
Minimum Buy Quantity	N/A

Fatigue limit load, Cu	0.06 kN
Harmonized Tariff Code	8482.10.50.68
Radial clearance class	CN
Internal Special Features	No
Max operating temperature, Tmax	120 °C
Maximum Capacity / Filling Slot	No
Min operating temperature, Tmin	-20 °C